
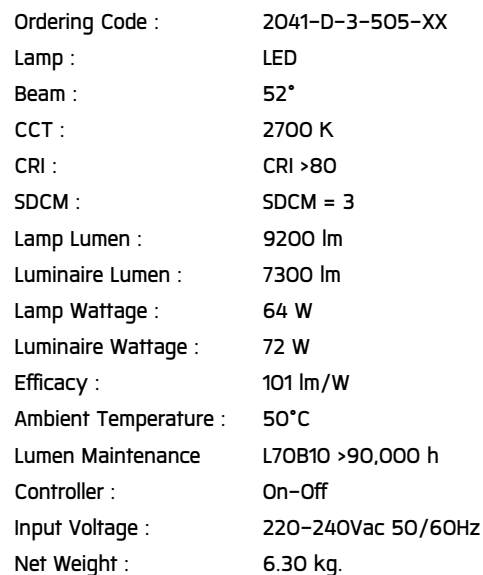


## SPOTLIGHT

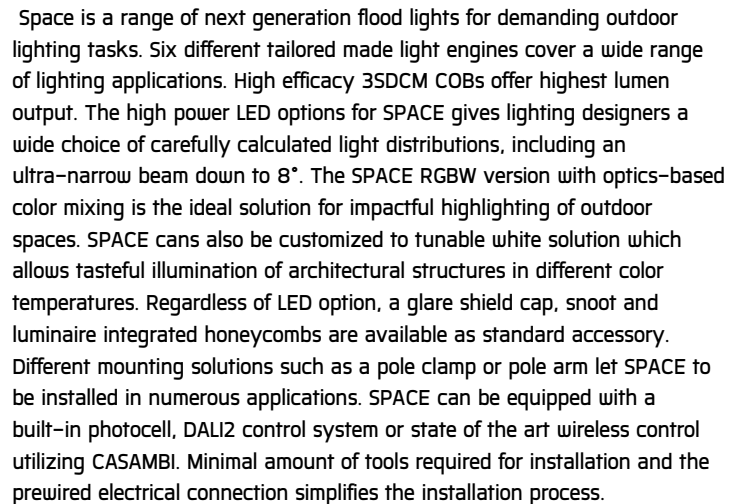

## Ordering code guide

XXXX-X-X-XXX-XX

- A Product Code
- B Reflector
- C Electrical Component
- D Lamp
- E Color



# SPACE

## MEDIUM SPACE

### SPOTLIGHT





LAST UPDATE: 19-08-2026

#### Specification

|                         |                                                                                                                                                                                                                                                     |  |          |  |             |  |              |  |                    |  |          |  |           |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------|--|-------------|--|--------------|--|--------------------|--|----------|--|-----------|
| IEC Standard            | IEC 60598-1 General Requirement<br>IEC 60598-2-1 Fixed Luminaires                                                                                                                                                                                   |  |          |  |             |  |              |  |                    |  |          |  |           |
| Protection              | IP66 Class I                                                                                                                                                                                                                                        |  |          |  |             |  |              |  |                    |  |          |  |           |
| IK Rating               | Protection against mechanical impact IK10 on body and IK09 on optical part.                                                                                                                                                                         |  |          |  |             |  |              |  |                    |  |          |  |           |
| Luminaires Body Housing | High-pressure die cast aluminum alloy body and components.                                                                                                                                                                                          |  |          |  |             |  |              |  |                    |  |          |  |           |
| Coating Process         | Nano Ceramic surface conversion, resistant to corrosive environment. Luminaire primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.                   |  |          |  |             |  |              |  |                    |  |          |  |           |
| Diffuser                | Impact resistant safety tempered glass cover. Able to withstand the temperature up to 250°C.                                                                                                                                                        |  |          |  |             |  |              |  |                    |  |          |  |           |
| Lens                    | Molded PC lens from renowned manufacturers in various light distribution patterns.                                                                                                                                                                  |  |          |  |             |  |              |  |                    |  |          |  |           |
| Adjustable Optic        | Adjustable aiming unit through graduated scale.                                                                                                                                                                                                     |  |          |  |             |  |              |  |                    |  |          |  |           |
| Gasket                  | Post-cured treated silicone gasket. Temperature and weather resistant. Working temperature -40°C to +200°C.                                                                                                                                         |  |          |  |             |  |              |  |                    |  |          |  |           |
| External Screws         | External screws are in stainless steel with protection grease.                                                                                                                                                                                      |  |          |  |             |  |              |  |                    |  |          |  |           |
| Cable Entry             | Cable entry protected by M20 cable gland. To be used with H05RN-F/ H07RN-F cable with 7-13mm. diameter.                                                                                                                                             |  |          |  |             |  |              |  |                    |  |          |  |           |
| Led                     | High efficiency LED module in COB technology. Assembled on MCPCB and mounted on to heat conductive material.                                                                                                                                        |  |          |  |             |  |              |  |                    |  |          |  |           |
| Driver                  | High quality constant current LED driver. Conform to safety standard and electromagnetic compatibility standard.                                                                                                                                    |  |          |  |             |  |              |  |                    |  |          |  |           |
| Enhanced Protection     | The luminaire is equipped with a 10kV surge protection device, the function of the protector is indicated by a LED, performance in compliance with IEC61643-11.                                                                                     |  |          |  |             |  |              |  |                    |  |          |  |           |
| Internal Wire           | Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C.                                                                                                                                   |  |          |  |             |  |              |  |                    |  |          |  |           |
| Terminal Block          | Terminal block in GFR PA6.6 for cable with cross section up to 2.5 sqmm. VDE approved.<br>Class1 luminaire provided with the earth connection.                                                                                                      |  |          |  |             |  |              |  |                    |  |          |  |           |
| Pre-Wire Cable          | Pre-wired with 3x1.0 sqmm. H07RN-F neoprene cable. IMQ approved.<br>Equipped with anti-humidity kit.                                                                                                                                                |  |          |  |             |  |              |  |                    |  |          |  |           |
| Caution                 | Installation work has to be carried on according to the enclosed installation manual.                                                                                                                                                               |  |          |  |             |  |              |  |                    |  |          |  |           |
| Color                   | <table><tr><td></td><td>Black O1</td></tr><tr><td></td><td>Graphite O2</td></tr><tr><td></td><td>Dark Gray O3</td></tr><tr><td></td><td>Aluminum Silver O4</td></tr><tr><td></td><td>White O6</td></tr><tr><td></td><td>Corten O8</td></tr></table> |  | Black O1 |  | Graphite O2 |  | Dark Gray O3 |  | Aluminum Silver O4 |  | White O6 |  | Corten O8 |
|                         | Black O1                                                                                                                                                                                                                                            |  |          |  |             |  |              |  |                    |  |          |  |           |
|                         | Graphite O2                                                                                                                                                                                                                                         |  |          |  |             |  |              |  |                    |  |          |  |           |
|                         | Dark Gray O3                                                                                                                                                                                                                                        |  |          |  |             |  |              |  |                    |  |          |  |           |
|                         | Aluminum Silver O4                                                                                                                                                                                                                                  |  |          |  |             |  |              |  |                    |  |          |  |           |
|                         | White O6                                                                                                                                                                                                                                            |  |          |  |             |  |              |  |                    |  |          |  |           |
|                         | Corten O8                                                                                                                                                                                                                                           |  |          |  |             |  |              |  |                    |  |          |  |           |

#### Light Distribution



\*Due to the constancy of product development,  
we reserve the right to alter all specification  
without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1  
Fax : +66(0)2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th

# SPACE

## MEDIUM SPACE

### SPOTLIGHT



LAST UPDATE: 19-08-2026

#### Accessories



Ordering Code:  
AUN-CON-0009-00  
IP68 connection device,  
cable diameter 5-9.5mm,  
On-Off



Ordering Code:  
AUN-CON-0010-00  
IP68 connection device 3  
pole, cable diameter  
5-9.5mm, with distribution  
block



Ordering Code:  
AUN-CON-0013-00  
IP68 connection device,  
cable diameter 7-11.5mm,  
On-Off



Ordering Code:  
AUN-CLP-0001-XX  
Pole clamp, pole diameter  
114mm



Ordering Code:  
AUN-ACB-0009-00  
Anchor bolt kit, pole  
diameter 114 and 114/140,  
galvanized steel pole



Ordering Code:  
AUN-ACB-0008-00  
Anchor bolt kit, pole  
diameter 102mm and  
151x102mm, galvanized  
steel pole



Ordering Code:  
AUN-ACB-0005-00  
Anchor bolt kit, aluminum  
pole



Ordering Code:  
AUN-SEN-0003-00  
Photocell, On-Off,  
pre-assembly from factory



Ordering Code:  
AUN-SEN-0004-00  
Microwave motion sensor,  
On-Off, pre-assembly from  
factory



Ordering Code:  
AUN-MOT-0001-XX  
Pole mount adaptor, spigot  
diameter 76mm for Medium  
SPACE



Ordering Code:  
AUN-MOT-0003-XX  
Mounting base, rotateable,  
1-10V or DALI for Medium  
SPACE



Ordering Code:  
ALUMINUM-POLE-MEDIUM-SPACE  
Please contact Sales  
Representative

\*Due to the constancy of product development,  
we reserve the right to alter all specification  
without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1  
Fax : +66[0]2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th

# SPACE

## MEDIUM SPACE

### SPOTLIGHT



LAST UPDATE: 19-08-2026



Ordering Code:  
STEEL-POLE-MEDIUM-SPACE  
Please contact Sales  
Representative



Ordering Code:  
AUN-MOT-0066-XX  
Wall or pole mounting arm,  
pole diameter 114mm single  
side



Ordering Code:  
AUN-MOT-0067-XX  
Wall or pole mounting arm,  
pole diameter 114mm,  
double