ALPHA

MICRO ALPHA ROUND SNOOT – CV

SPOTLIGHT

LAST UPDATE: 19-02-2026

ALPHA is an entirely new family of outdoor spotlights/floodlights engineered from scratch. The primary shapes and overall small dimensions make it possible to install ALPHA in most professional and residential lighting applications. High-quality polycarbonate optics provide accurate beam control and offer a wide selection of light distributions. ALPHA can be customized with accessories such as honeycombs, shields and various mounting solutions for poles and surfaces. The minimized amount of needed tools and usage of quick connectors simplifies the installation.

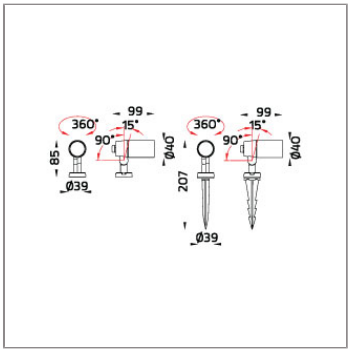

Technical Data

IP66 IK 08 06

Ordering Code :	5914-B-2-562-XX
Lamp :	LED
Beam :	25°
CCT :	3000 K
CRI :	CRI >80
SDCM :	SDCM = 3
Lamp Lumen :	370 lm
Luminaire Lumen :	100 lm
Lamp Wattage :	3.3 W(12Vdc/24Vdc)
Luminaire Wattage :	3.3 W
Efficacy :	30 lm/W
Ambient Temperature :	50°C
Lumen Maintenance	L80B10 >108,000 h
Controller :	Remote
Input Voltage :	12Vdc/24Vdc
Net Weight :	0.30 kg.

Ordering code guide

B D

XXXX-X-X-XXX-XX

A C E

A Product Code
B Reflector
C Electrical Component
D Lamp
E Color

IK BODY OPTIC Icon definition

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

ALPHA

MICRO ALPHA ROUND SNOOT – CV

SPOTLIGHT

LAST UPDATE: 19-02-2026

Specification

IEC Standard	IEC 60598-1 General Requirement
	IEC 60598-2-1 Fixed Luminaires
Protection	IP66 Class III
IK Rating	Protection against mechanical impact IK08 on body and IK06 optical part.
Luminaires Body Housing	High-pressure die cast aluminum alloy body and components.
Coating Process	Nano Ceramic surface conversion, resistant to corrosive environment. Luminiare primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.
Diffuser	Impact resistant safety tempered glass cover. Able to withstand the temperature up to 250°C.
Lens	Molded PC lens from renowned manufacturers in various light distribution patterns.
Adjustable Optic	Adjustable aiming unit through graduated scale.
Gasket	Post-cured treated silicone gasket. Temperature and weather resistant. Working temperature -40°C to +200°C.
External Screws	External screws are in stainless steel with protection grease.
Cable Entry	Cable entry protected by M12 cable gland. To be used with HO5RN-F/ HO7RN-F cable with 4-7mm. diameter.
Led	High efficiency LED module utilized chips from world renowned manufacturer. Assembled on MCPCB and mounted on to heat conductive material.
Driver	Driver is not included and has to be ordered separately.
Pre-Wire Cable	Pre-wired with 2x1.0 sqmm. HO5RN-F neoprene cable. IMQ approved.
	Equipped with anti-humidity kit.
Caution	Installation work has to be carried on according to the enclosed installation manual.
Color	Black 01 Graphite 02 Dark Grey 03 Aluminum Silver 04 White 06 Corten 08

Light Distribution





Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

ALPHA

MICRO ALPHA ROUND SNOOT - CV

SPOTLIGHT

LAST UPDATE: 19-02-2026

Bug Report

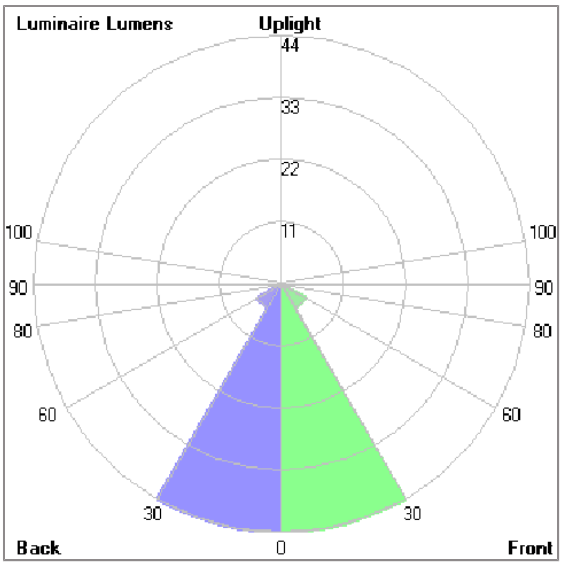

Lum. Classification System [LCS]

LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	44.5	12.0	44.6
FM	[30-60]	5.0	1.4	5.0
FH	[60-80]	0.4	0.1	0.4
FVH	[80-90]	< 0.05	0.0	0.0
BL	[0-30]	44.5	12.0	44.6
BM	[30-60]	5.0	1.4	5.0
BH	[60-80]	0.4	0.1	0.4
BVH	[80-90]	< 0.05	0.0	0.0
UL	[90-100]	0.0	0.0	0.0
UH	[100-180]	0.0	0.0	0.0
Total		99.8	27.0	100.0
BUG Rating		B0-U0-G0		

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

ALPHA

MICRO ALPHA ROUND SNOOT - CV

SPOTLIGHT

LAST UPDATE: 19-02-2026

Accessories

Ordering Code:
AUN-DRG-0114-01
LED constant voltage driver, 12VDC, 12W, with IP67 GFR polymer enclosure



Ordering Code:
AUN-DRG-0011-00
LED constant voltage driver, 24VDC, 150W

Ordering Code:
AUN-ESP-0003-XX
Earth spike, L= 900mm, aluminum, pre-assembly from factory

Ordering Code:
AUN-TRS-0004-00
Tree Strap



Ordering Code:
AUN-GSH-0015-00
Honeycomb louver, LED, pre-assembly from factory



Ordering Code:
AUN-DRG-0024-00
LED constant voltage driver, 24VDC, 200W



Ordering Code:
AUN-DRG-0027-00
LED constant voltage driver, 24VDC, 72W

Ordering Code:
AUN-ESP-0006-XX
Earth spike, L= 900mm, aluminum, single side luminaire mounting

Ordering Code:
AUN-ESP-0007-XX
Earth spike, L= 900mm, aluminum, double sided luminaire mounting



Ordering Code:
AUN-DRG-0118-00
LED constant voltage driver, 24VDC, 30W

Ordering Code:
AUN-DRG-0126-00
LED constant current driver, 250mA, 12W, with IP67 GFR polymer enclosure, On-Off, BLACK



Ordering Code:
AUN-DRG-0100-00
LED constant voltage driver, 24VDC, 60W, DALI

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

ALPHA

MICRO ALPHA ROUND SNOOT - CV

SPOTLIGHT

LAST UPDATE: 19-02-2026



Ordering Code:
AUN-DRG-0101-00
LED constant voltage driver, 24VDC, 120W, DALI

Ordering Code:
ATR-MOT-0009-A1
Mounting Ring, D = 600mm.

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th