# DARIUS

## DARIUS

### WALL SURFACE LIGHT

LAST UPDATE: 23-07-2026

DARIUS is a circular-shaped surface-mount light featuring a robust aluminum housing and impact-resistant polycarbonate lens cover. Its diffused light distribution provides general illumination in private, public, and commercial areas. DARIUS is available with AC COB LED or E27 lamp holder for compact fluorescent, or retrofit LED lamps. The lens cover is designed with a twist-lock mechanism, which allows for simple and secure installation and re-lamping procedures. The high protection rating of IP65 and IK09 allows DARIUS to be installed in the majority of outdoor environments.

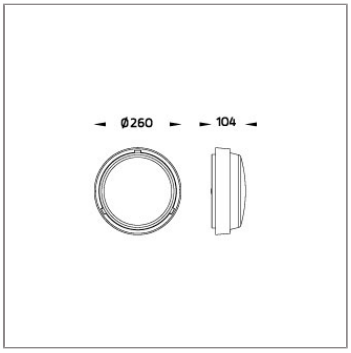


## Technical Data

IP65

| | |
|---|---|
| Ordering Code : | 7071-0-3-499-XX |
| Lamp : | LED Retrofit |
| CCT : | 6500 K |
| Lamp Lumen : | 1500 lm |
| Luminaire Lumen : | 340 lm |
| Lamp Wattage : | 18 W |
| Luminaire Wattage : | 18 W |
| Efficacy : | 18 lm/W |
| Ambient Temperature : | 40°C |
| Controller : | On-Off |
| Input Voltage : | 220-240Vac 50/60Hz |
| Net Weight : | - kg. |

Ordering code guide

B D

XXXX-X-X-XXX-XX

A C E

A Product Code
B Reflector
C Electrical Component
D Lamp
E Color

IK BODY OPTIC Icon definition

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

# DARIUS

## DARIUS

### WALL SURFACE LIGHT

LAST UPDATE: 23-07-2026

## Specification

| | |
|---|---|
| IEC Standard | IEC 60598-1 General Requirement |
| | IEC 60598-2-1 Fixed Luminaires |
| Protection | IP65 Class I |
| Luminaires Body Housing | High-pressure Die Cast Aluminium alloy body and components. |
| Coating Process | UV stablized polyester powder coat. |
| Diffuser | Vandal proof PC diffuser |
| Gasket | Durable silicone gasket |
| External Screws | External screws made of stainless steel |
| Led | High efficiency LED module |
| Caution | Installation work has to be carried on according to the enclosed installation manual. |
| Color | Black 01<br>Graphite 02<br>Dark Grey 03<br>Aluminum Silver 04<br>White 06<br>Wooden Brown 07 |

## Light Distribution







*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

# DARIUS

## DARIUS

WALL SURFACE LIGHT

LAST UPDATE: 23-07-2026

### Bug Report

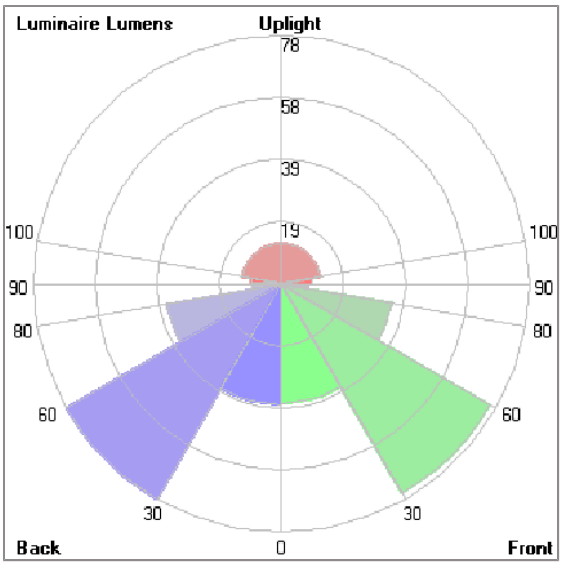


**Lum. Classification System (LCS)**

| LCS | Zone | %Lumens | %Lamp | %Lum |
|---|---|---|---|---|
| FL | [0-30] | 37.4 | 2.5 | 11.0 |
| FM | [30-60] | 75.8 | 5.1 | 22.3 |
| FH | [60-80] | 35.2 | 2.3 | 10.4 |
| FVH | [80-90] | 8.4 | 0.6 | 2.5 |
| BL | [0-30] | 37.9 | 2.5 | 11.2 |
| BM | [30-60] | 77.9 | 5.2 | 22.9 |
| BH | [60-80] | 36.5 | 2.4 | 10.7 |
| BVH | [80-90] | 8.9 | 0.6 | 2.6 |
| UL | [90-100] | 9.5 | 0.6 | 2.8 |
| UH | [100-180] | 12.5 | 0.8 | 3.7 |
| Total | | 340.0 | 22.6 | 100.0 |
| BUG Rating | | B0-U2-G0 | | |

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th